



BAUER COMMUNICATIONS, INC.


PRECISION TRANSFORMERS

By Reichenbach Engineering

line in
10K:600
+24dBu

RE-6110K-B

LINE INPUT TRANSFORMER

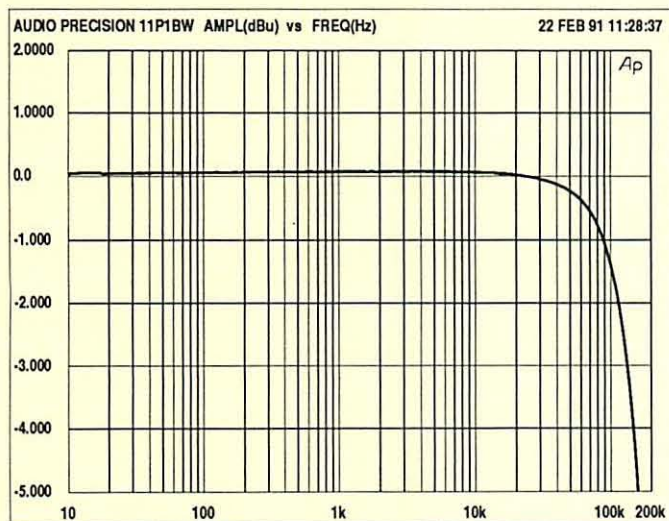

RE-6110K-B MAGNITUDE RESPONSE

- Impedance Ratio: 10K ohms to 600 ohms
- Primary source Impedance: 600 ohms or less
- Turns Ratio: 4:1
- 20Hz Max Input Level: +24 dBu
- Bandwidth (-3db point): 125 kHz
- Magnetic Shield: 30db case with separate lead (Wht)
- Faraday Shield: 1 with separate lead (Blk)
- Recommended Load: 2.2K
- RC network: None

NOTE: All transformers formerly sold under the *Jensen Transformers* name are the design and manufacture of Reichenbach Engineering.

Specifications subject to change without notice or obligation.

©1991 BCI



RE-6110K-B 20Hz DISTORTION

